


Portable complete hydraulic valve with Sagiv +PRV (1-5.5 bar) 75 mm with male and female plastic quick coupling



Double side hydrant with 2 isolation valve of 75 mm

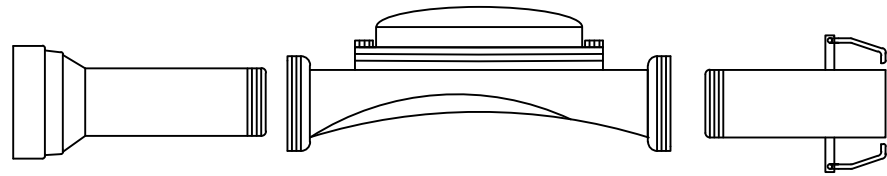

Pipe buried max 80 cm

110 cm

Pressure gauge 10 bar x 100 mm

Butterfly valve
size as per discharge pipe

Min of 10 x OD

Min 20 x OD

2x50 mm air/vacuum valve
with isolation steel ball valve

Drain 2" steel ball valve

Flanged Water meter
size as per nominal flow


Check/non return valve
(prevent backflow to water meter)

Hydrant with 3/4" air/vacuum valve

Ground clearance min 30 cm

110 cm

Portable pressure gauge for measuring
outgoing pressure on lateral sprinkler outlet



GENERAL NOTES

SPIS - Sprinkler

Parts drawing

Desenhado por:
S.17

Verificado por:
Enabel

Aprovado por:
Enabel

Data:
23-Jun-25

Enabel

PROJECT NO:

SCALE:
N/A

SHEET SIZE:
A3

DRAWING NO:

SHEET NO:

REVISION:

UNIT:

REV:	DESCRIPTION:	BY:	DATE: